


## LVCMOS TCXO

## CHSK04-7□□L Series

### ◆特長・用途/Feature

- SMD Package
- Supply Voltage +3.3V
- Output Level LVCMOS
- Frequency range 10MHz ~ 100MHz

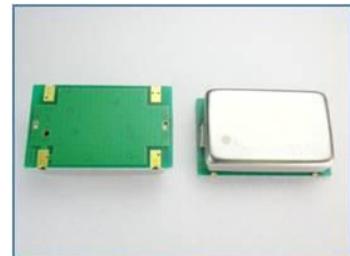


### ◆仕様/Specifications

RoHS Compliant

項目 / item	CHSK04-710LR		CHSK04-725LR		CHSK04-750LR		単位 / unit	Note
	Min	Max	Min	Max	Min	Max		
出力周波数 Frequency range	10	100	10	100	10	100	MHz	--
動作温度範囲 Operating Temp. range	0	+60	0	+60	0	+60	°C	--
電源電圧 Power Supply voltage	+3.3					V	--	
消費電流 Current	--	20	--	20	--	20	mA	--
周波数安定度 Freq. Overall tolerance	$\pm 1.0$		$\pm 2.5$		$\pm 5.0$		$10^{-6}$	Inclusive of initial tolerance , operating temperature.
電源電圧変動安定度 Supply voltage change	-0.5	+0.5	-0.5	+0.5	-0.5	+0.5	$10^{-6}$	+3.3V $\pm 5\%$
エーティング Freq. Aging	-1	+1	-1	+1	-1	+1	$10^{-6}$	1 year
出力レベル Output level	VOH	80% VDD	--	80% VDD	--	80% VDD	--	V
	VOL	--	20% VDD	--	20% VDD	--	20% VDD	V
Rise time , Fall time	--	5	--	5	--	5	ns	20%VDD $\leftrightarrow$ 80%VDD
Duty Cycle	40	60	40	60	40	60	%	50%VDD

### ◆外形寸法/Dimensions unit : mm

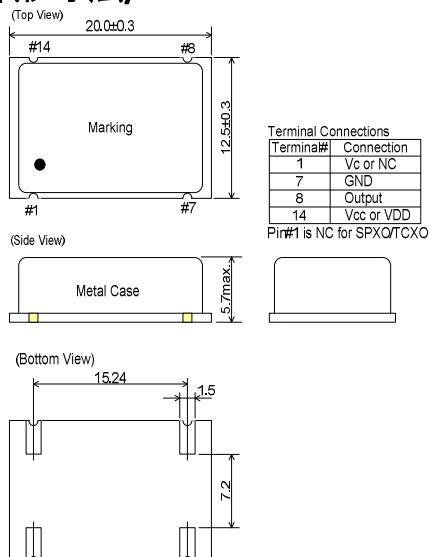

NAKA & CO.,LTD.