


Sine Wave SPXO

CHSK-6□□S/U Series

◆特長・用途/Feature

- SMD Package
- Supply Voltage **+5.0V, +3.3V**
- Output **Sine Wave**
- Frequency range **10MHz ~ 360MHz**

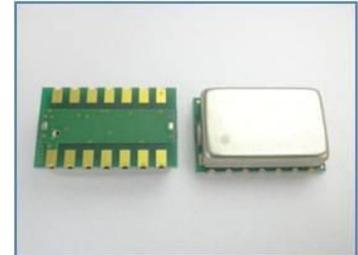

◆仕様/Specifications

RoHS Compliant

項目 / item	CHSK-610□		CHSK-625□		CHSK-650□		単位 / unit	Note
	Min	Max	Min	Max	Min	Max		
出力周波数 Frequency range	10	360	10	360	10	360	MHz	--
動作温度範囲 Operating Temp. range	0	+70	0	+70	0	+70	°C	--
電源電圧 Power Supply voltage	6□□U: +3.3 6□□S: +5.0						V	--
消費電流 Current	--	20	--	20	--	20	mA	--
周波数安定度 Freq. Overall tolerance	±10		±25		±50		10 ⁻⁶	Inclusive of initial tolerance , operating temperature.
電源電圧変動安定度 Supply voltage change	-1	+1	-1	+1	-1	+1	10 ⁻⁶	Vcc±5%
出力レベル Output level	0dBm±3dB						--	Sine wave 負荷Load : 50Ω
低調波 Sub-harmonics	--	-30	--	-30	--	-30	dBc	--
高調波 Harmonics	--	-20	--	-20	--	-20	dBc	--

◆外形寸法/Dimensions unit : mm

