

# DC solid state relays S1D series

**New release**

**S1D-4010WD**

Load voltage DC450V

Maximum load current 10A

## ■ Features

- High-speed, high-frequency control
- Operation indicator with LED
- Private heat-sink in options
- Safety cover in options



## ■ Ratings

(Ta=25°C)

Items		Symbols	S1D-4010WD	S1D-0540WD	S1D-0515WD	S1D-1010WD	S1D-2005WD	Units
Output	Maximum Load	VOMAX	600	60		150	200	VDC
	Load Voltage Range	Pure DC Bridge Rectification	VO	5~450		3~50		VDC
				300		35		Vrms
	Maximum Load Current	IOMAX	10	40	15	10	5	ADC/Arms
Surge Current Ratings	ISURGE	30 (1sec)	120 (1sec)	50 (1sec)	25 (1sec)	10 (1sec)	A	
Input	Maximum Input	VIMAX	28					VDC
	Max Input Current	IIMAX	20					mADC
General	Dielectric Strength	VISO	2,500 1Min (input-output-case)(Rh40~60%)					VACrms
	Isolation Resistance	RISO	10 <sup>8</sup> (MIN) DC500V (input-output-case)(Rh40~60%)					Ω
	Operating Temperature Range	TOPR	-20~80					°C
	Storage Temperature Range	TSTG	-30~100					°C

## ■ Electrical Characteristics

(Ta=25°C)

Items		Symbols	S1D-4010WD	S1D-0540WD	S1D-0515WD	S1D-1010WD	S1D-2005WD	Units
Output	Off State Leakage Current	ILEK	0.1(MAX) (Vo=450V)	0.1(MAX) (Vo=50V)		0.1(MAX) (Vo=120V)	0.1(MAX) (Vo=200V)	mADC
	On State Voltage Drop	VSAT	1.5(MAX)	0.5(MAX)		1.5(MAX)	1.5(MAX)	VDC
	Minimum Load Current	IOMIN	0.1					mA
Input	Input Voltage Range	VI	4~28					VDC
	Operate Voltage	VP	4(MAX)					VDC
	Release Voltage	VD	1(MIN)					VDC
General	Operate Time	TON	1ms(MAX) (Resistive load)		5ms(MAX) (Resistive load)			/
	Release Time	TOFF	1ms(MAX) (Resistive load)		5ms(MAX) (Resistive load)			
	Capacitance	CIO	150(MAX)					PF


**JEL SYSTEM CO., LTD**

4-2-11, Kudanminami, Chiyoda-Ku, Tokyo, 102-0074 JAPAN

TEL +81-3-5211-5612 FAX +81-3-5210-3022

URL : <https://www.jelsystem.co.jp> e-mail : [contact1@jelsystem.co.jp](mailto:contact1@jelsystem.co.jp)

## ■Dimensions (mm)

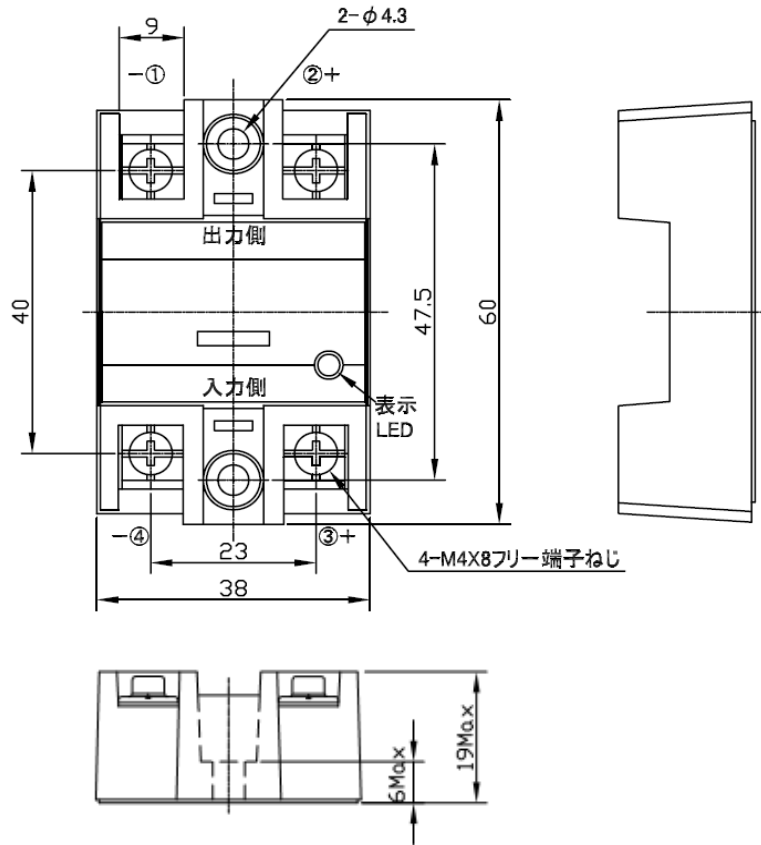

## ■Characteristic curves

