


AC Solid State Relay



P5/P6 SERIES

Features


- Resin casted molding type
- Available for PCB high-density packaging
- Max. load current at 2A, 3A
- Dielectric strength between input and output at 2,500V/1 min.

Type Information

P 5 C - 2 0 2 L				
Basic model	Zero-cross-circuit	Standard load voltage	Max. load current	Input voltage range
P5 : With between input terminals 5.08mm	C : Built-in N : Not Built-in(*1)	2 : 100V, 200V	02 : 2A 03 : 3A	L : DC 4 ~ 8V M : DC 8 ~ 18V(*1) H : DC 18 ~ 28V(*1)
P6 : With between input terminals 7.62mm(*2)				


(*1) Manufactured to order
(*2) P6□202 type is not available

Characteristics

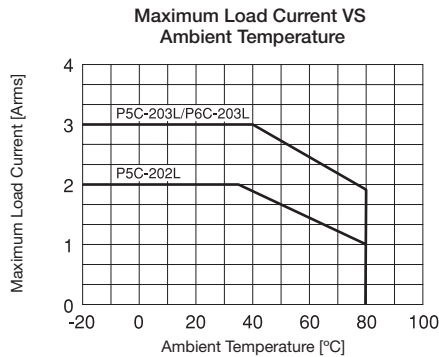

※ Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.
 ※ Please contact JEL SYSTEM for further information.


Dimensions (mm)

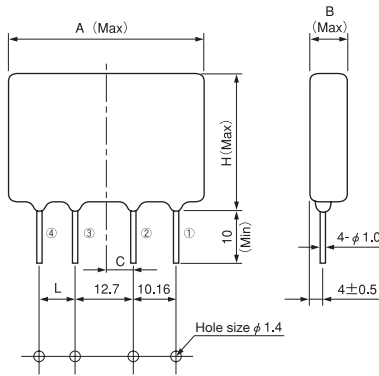

Model	Size	A	B	C	H	L
P5C-202L		35	8	3.8	20	5.08
P5C-203L		41	10	4.7	26	5.08
P6C-203L		41	10	4.7	26	7.62

Dimensions For PCB Design

Equivalent Circuit

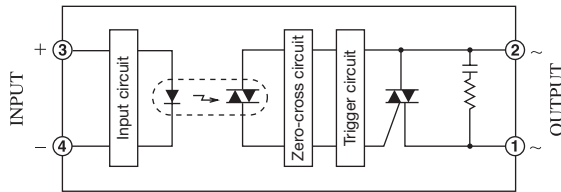

※ Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.
 ※ Please contact JEL SYSTEM for further information.

■ Ratings

(Ta = 25 °C)

	Item	Symbols	P5C-202L	P5C-203L/P6C-203L	Units
Output	Rated Load Voltage	—	120, 240		V _{ACrms}
	Maximum Load Current	I _{OMAX}	2	3	A _{ACrms}
	Maximum Load Voltage	V _{OMAX}	264		V _{ACrms}
	Peak Repetitive Off State Voltage	V _{DRM}	600		V
	Peak 1 Cycle Surge Current	I _{SURGE}	30 (50Hz)	50 (50Hz)	A
	Frequency	f	50, 60		Hz
Input	Maximum Input Voltage	V _{IMAX}	8		V _{DC}
	Input Impedance	R _{IN}	270 ± 20%		Ω
General	Dielectric Strength	V _{ISO}	2,500/1 min.(Between input and output)		V _{ACrms}
	Isolation Resistance	R _{ISO}	10 ⁹ and above DC500V(Between input and output)		Ω
	Operating Temperature Range	T _{OPR}	- 20 ~ + 80		°C
	Storage Temperature Range	T _{STG}	- 30 ~ + 100		°C




■ Electrical Characteristics

(Ta = 25 °C)

	Item	Symbols	P5C-202L	P5C-203L/P6C-203L	Units
Output	Load Voltage Range	V _o	35 ~ 264		V _{ACrms}
	Off State Leakage Current	I _{LEK}	5 and below(V _o = 200V)		mA _{ACrms}
	On State Voltage Drop	V _{SAT}	1.5 and below		V _{ACrms}
	Minimum Load Current	I _{OMIN}	20		mA
Input	Input Voltage Range	V _i	4 ~ 8		V _{DC}
	Operate Voltage	V _P	4 and below		V _{DC}
	Release Voltage	V _D	1 and above		V _{DC}
General	Operate Time	T _{ON}	1/2 Cycle + 1 ms and below		
	Release Time	T _{OFF}	1/2 Cycle + 1 ms and below		
	Capacitance	C _{IO}	15 and below		PF
	Zero Cross Turn On		Built In		
	Approved Standards		—		

※ Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.

※ Please contact JEL SYSTEM for further information.

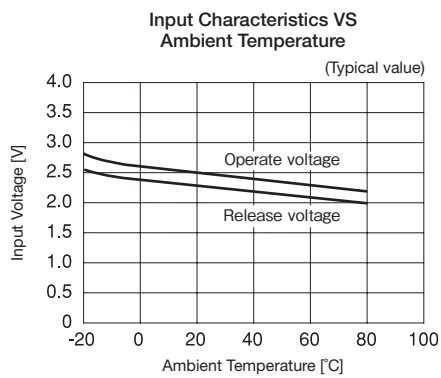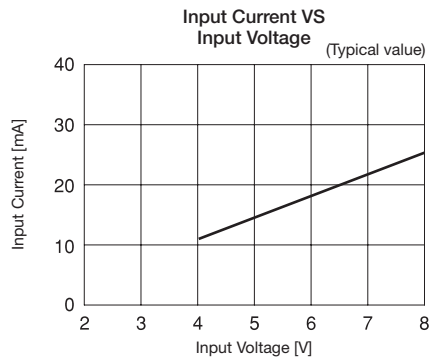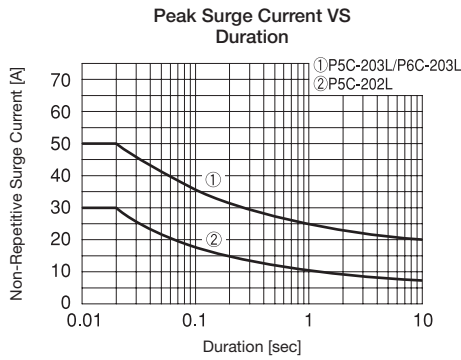

※ Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.
 ※ Please contact JEL SYSTEM for further information.