


# Sine Wave TCXO

# CHSK04-7□□S/U Series

## ◆特長・用途/Feature

- SMD Package
- Supply Voltage      **+5.0V, +3.3V**
- Output                 **Sine Wave**
- Frequency range    **10MHz ~ 100MHz**

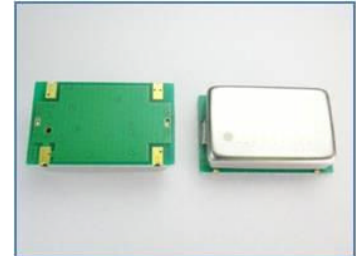

## ◆仕様/Specifications

RoHS Compliant

項目 / item	CHSK04-710□		CHSK04-725□		CHSK04-750□		単位 / unit	Note
	Min	Max	Min	Max	Min	Max		
出力周波数 Frequency range	10	100	10	100	10	100	MHz	--
動作温度範囲 Operating Temp. range	0	+60	0	+60	0	+60	°C	--
電源電圧 Power Supply voltage	7□□U: +3.3 7□□S: +5.0						V	--
消費電流 Current	--	20	--	20	--	20	mA	--
周波数安定度 Freq. Overall tolerance	±1.0		±2.5		±5.0		10 <sup>-6</sup>	Inclusive of initial tolerance , operating temperature.
電源電圧変動安定度 Supply voltage change	-0.5	+0.5	-0.5	+0.5	-0.5	+0.5	10 <sup>-6</sup>	Vcc±5%
エージング Freq. Aging	-1	+1	-1	+1	-1	+1	10 <sup>-6</sup>	1 year
出力レベル Output level	0dBm±3dB						--	Sine wave 負荷Load : 50Ω
低調波 Sub-harmonics	--	-30	--	-30	--	-30	dBc	--
高調波 Harmonics	--	-20	--	-20	--	-20	dBc	--

## ◆外形寸法/Dimensions unit : mm

